




LINE POST POLIMÉRICO

Polymer distribution line post insulators

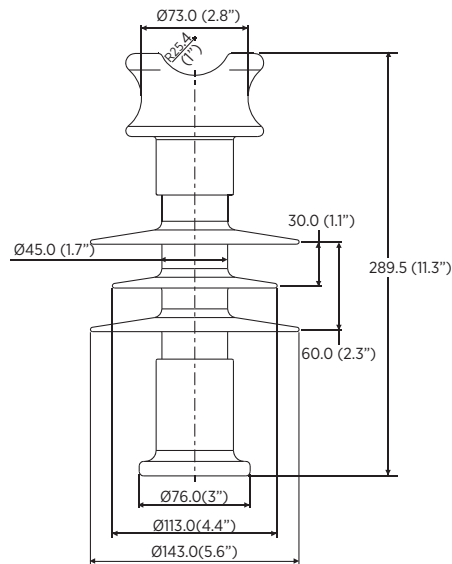

PL0150011

NÚMERO DE CATÁLOGO		PL0150011
ANSI (C29.18)		
Clase		51-4F
Cuello		F
DISTANCIAS CRÍTICAS, mm		
Distancia de arco		165
Distancia de fuga		350
VALORES ELÉCTRICOS, kV		
Voltaje nominal		15
Flameo de baja frecuencia en seco		85
Flameo de baja frecuencia en húmedo		55
Flameo crítico al impulso positivo		150
Flameo crítico al impulso negativo		155
VALORES MECÁNICOS, kN		
SCL		12.4
MDCL		6.0
STL		22.2
RADIO INFLUENCIA		
Voltaje de prueba RMS a tierra kV		10
RIV máximo a 1,000 kHz, μ V		4
DIMENSIONES SEGÚN ESQUEMA		
Tamaño nominal de la rosca		3/4"

Nota: Medidas en mm (pulgadas).
Cubierta: Silicona "high voltage" vulcanizada a alta temperatura.
Herrajes: Acero galvanizado en caliente.

CATALOG NUMBER		PL0150011
ANSI (C29.18)		
Class		51-4F
Neck type		F
CRITICAL DISTANCES, mm		
Arcing distance		165
Leakage distance		350
ELECTRICAL VALUES, kV		
Rated voltage		15
Low-frequency dry flashover		85
Low-frequency wet flashover		55
Critical impulse flashover, positive		150
Critical impulse flashover, negative		155
MECHANICAL VALUES, kN		
SCL		12.4
Maximum density cantilever load		6.0
Tensile strength		22.2
RADIO INFLUENCE VOLTAGE DATA		
Low-frequency test voltage, RMS to ground, kV		10
Maximum RIV at 1,000 kHz, μ V		4
DIMENSIONS ACCORDING TO DRAWING		
Center hole nominal thread size		3/4"

Note: Dimensions in mm (in).
Housing: High voltage silicone - High temperature vulcanized (HTV).
Fittings: Hot dip galvanized steel.